

1900705

sport

Fiat 156.A2.100 fire (55hp)
I-4cyl 1.0L 8v SOHC (DT/DT)



intake exhaust

camshaft data:

lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 256°	256°
duration @ 1.0mm	: 220°	220°
valve lift	: 9.55mm	9.55mm
cam lift	:	
lobe angle	: 106°	106°
timing @ 1.0mm	: 4° / 36°	36° / 4°
valve lift @ TDC	: 1.65mm	1.70mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

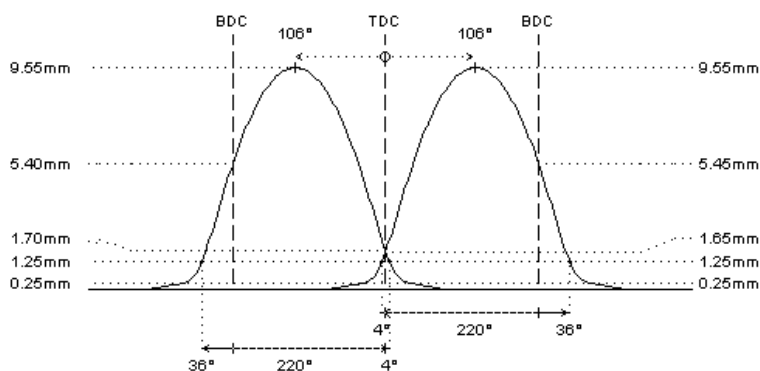

REMARKS :

steel billet camshafts

1900708

hot street - dirt track

Fiat 156.A2.100 fire (55hp)


I-4cyl 1.0L 8v SOHC (DT/DT)



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 283°	283°
duration @ 1.0mm	: 245°	245°
valve lift	: 10.00mm	10.00mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 15° / 50°	51° / 14°
valve lift @ TDC	: 2.75mm	2.75mm
parts setup:		
cam wheels :	: CTFI030	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	
fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

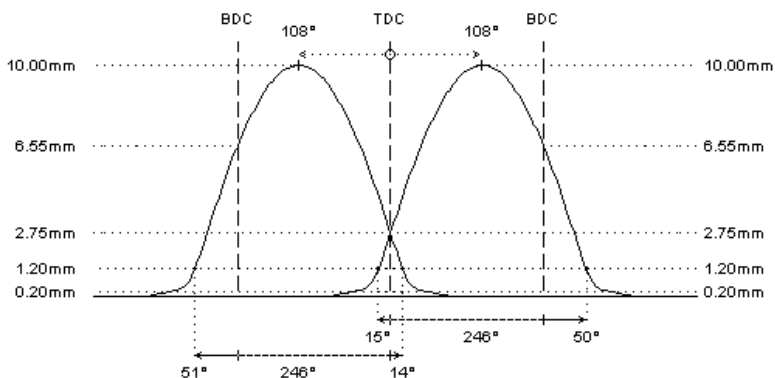**REMARKS :**

steel billet camshafts