

1901604


sport

Fiat 182 A4.000 103hp

I-4cyl 1.6L 16v DOHC (DTH/DTH)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 257°	257°
duration @ 1.0mm	: 215°	215°
valve lift	: 8.90mm	8.90mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -3° / 38°	37° / -2°
valve lift @ TDC	: 0.75mm	0.80mm
<b>parts setup:</b>		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.
fitted load / length	: 42kg @ 35.0mm	: 42kg @ 35.0mm
max. load / lift	: 0kg @ 11.0mm	: 0kg @ 11.0mm

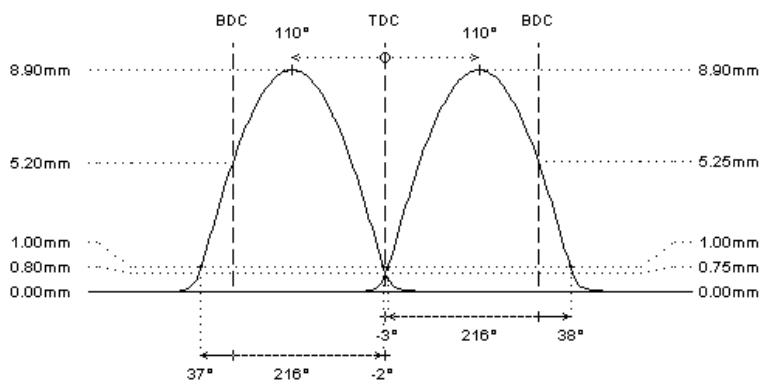

**REMARKS :**

**REMARKS :**

1901605


sport

Fiat 182 A4.000 103hp

I-4cyl 1.6L 16v DOHC (DTH/DTH)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 257°	253°
duration @ 1.0mm	: 215°	210°
valve lift	: 8.90mm	8.50mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -3° / 38°	35° / -5°
valve lift @ TDC	: 0.75mm	0.50mm
<b>parts setup:</b>		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.
fitted load / length	: 42kg @ 35.0mm	: 42kg @ 35.0mm
max. load / lift	: 0kg @ 11.0mm	: 0kg @ 11.0mm

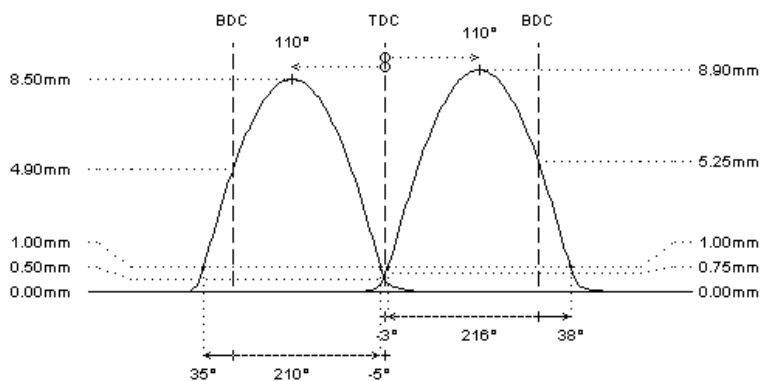

REMARKS :

REMARKS :

# 1901655

full race

Fiat 182 A4.000 103hp

I-4cyl 1.6L 16v DOHC (DTH/DTH)



intake exhaust

### camshaft data:


lash ramp	: 0.20mm	0.25mm
duration @ 0.1mm	: 294°	293°
duration @ 1.0mm	: 262°	256°
valve lift	: 12.20mm	11.95mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: 21° / 61°	58° / 18°
valve lift @ TDC	: 3.95mm	3.45mm

### parts setup:

cam wheels :	:	:
follower	: CC002	: CC002
valve lash	: TS102	: TS102
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-E92009	: PAC-E92009
interior spring	: PAC-I92009	: PAC-I92009

fitted load / length	: 30kg @ 35.0mm	: 30kg @ 35.0mm
max. load / lift	: 98kg @ 14.0mm	: 98kg @ 14.0mm

REMARKS :

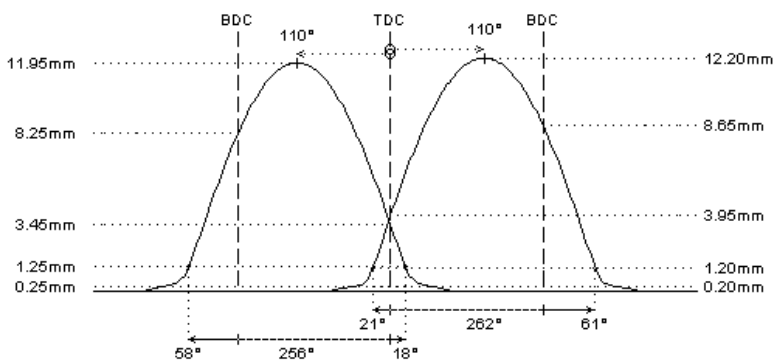

REMARKS :

1901658


tarmac rally - race

Fiat 182 A4.000 103hp

I-4cyl 1.6L 16v DOHC (DTH/DTH)



	intake	exhaust
<b>camshaft data:</b>		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 290°	282°
duration @ 1.0mm	: 252°	244°
valve lift	: 12.00mm	11.50mm
cam lift	:	
lobe angle	: 105°	105°
timing @ 1.0mm	: 21° / 51°	47° / 17°
valve lift @ TDC	: 3.90mm	3.30mm
<b>parts setup:</b>		
cam wheels :	:	:
follower	:  CC002	:  CC002
valve lash	:  TS102	:  TS102
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	:  PAC-E92009	:  PAC-E92009
interior spring	:  PAC-I92009	:  PAC-I92009
fitted load / length	: 30kg @ 35.0mm	: 30kg @ 35.0mm
max. load / lift	: 98kg @ 14.0mm	: 98kg @ 14.0mm

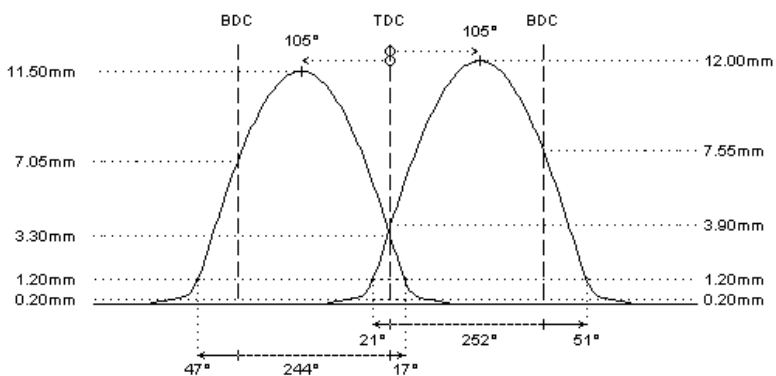

REMARKS :

REMARKS :